sixton SAFETY SHOES peak

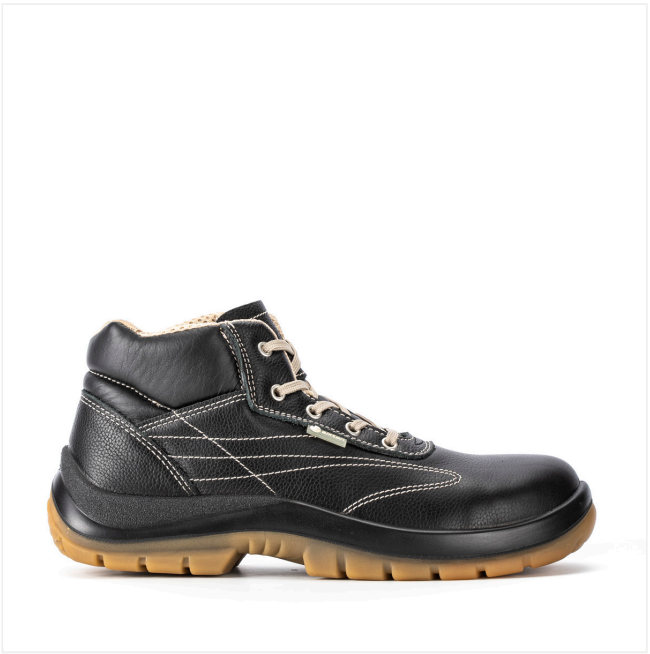

EN ISO 20345:2011

URBAN

CANTU'

82151-00L

S3 SRC

Size: 36-48
Weight: 675 gr.

Fit: 11

Working Environment:
Multipurpose, Wood-metal carpentry, Logistics and Light Industry, Components and Automotive

FEATURES

UPPER
Drummed leather Hydro 1,8-2,0 mm

LINING
3D Air circulation 320 gr.

ANTISLIP LINING
DUALMICRO

INSOLE
Flyfit

TOE CAP
CTC- Composite Toe Cap

RESISTANCE TO PERFORATION
Zero(K) Perforation resistant

TYPE
Ankle boot

SOLE
PU DUAL-DENSITY SRC
Two-component PU outsole with tread designed mainly for indoor use. Self-cleaning design and highly non-slip grip. SRC Antislip standard.

S E FO A WRU P SRC

SRC (SRA+SRB)

SOLE 82
PU - PU

SRA CERAMIC + DETERGENT SOLUTION	FLAT ≥0.32	0.47
	HEEL (CONTACT ANGLE 7°) ≥0.28	0.43
SRB STEEL + GLYCEROL	FLAT ≥0.18	0.21
	HEEL (CONTACT ANGLE 7°) ≥0.13	0.16

EN ISO 20344:2011

TECHNOLOGIES

Removable Insole

// FLYFIT

The upper layer in contact with the foot is made of a highly resistant netting to ensure exceptional absorption of dampness. A self-forming antibacterial foam layer ensures comfort and correct support of the foot.

Protection elements

ZERO(k) ANTIPERFORATION

Composite Toe Cap

Toecap made of plastic, incredibly light and resistant to impact of over 200J, elastic. Athermic. Not detected by metal detector. Fabric anti-perforation foil. Resistant to over 1100 N with zero perforation.

Lateral stability

dynamic HC control technology

Ergonomic rigid internal structure. It houses the heel into the right seat, adjusting the foot support and control of the ankle sideways movements. It keeps the foot tight to the shoe, allowing the perfect fit.

Torsional stability

STABIL•ACTIVE

Support made of rigid plastic material. It stabilizes the heel bone, the instep and tarsal joints, without altering energy absorption. A support for the natural movement of the foot; it provides comfort and greater stability.

Electrical features

WED
Wire Electricity Discharge

Strip with 4 filaments of carbon fiber, ensuring proven anti-static properties of the footwear over time.

Other

DUALMICRO

Double non-slip layer of microfibre, resistant up to 200,000 cycles. Makes the footwear more comfortable, blocking the foot during use.

Maspica S.p.A. Via Einstein,6 - 35020 Casalserugo - Padova / Italy - Cap. Soc. 1.050.000 i.v. - cod. fisc. e Reg. Imp. 04009100282 p. iva IT04009100282
C.C.I.A.A./R.E.A.354572 tel. +39 049 8740771 fax +39 049 8741376 www.sixton.it - info@maspica.it

Questo documento è di proprietà di Maspica SpA, che si riserva di modificarne i contenuti. È vietata ogni riproduzione, anche parziale